


STANDARD SPECIFICATIONS

DRIP EDGE

SOLID COPPER FLASHING

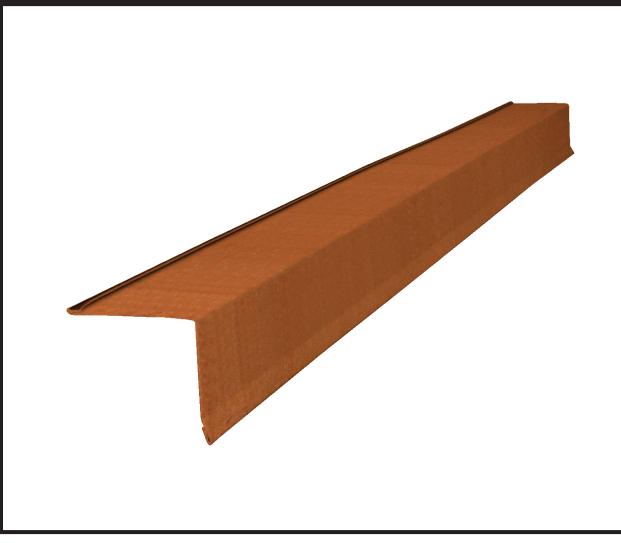

Use:

Flashing installed at roof line to protect sheathing from water penetration.

Feature:

4' pieces made from .0160 solid copper. 1.5"x1.5", made in 4' or 10' sections. Features a lap notch specially designed for a perfect fit to keep water from seeping through to the fascia and roof. The weep stop protects roof sheathing from water penetration during driving rains. Available in 30 painted aluminum colors, 16 oz. solid copper and 26 ga. galvalume plus.